

Hyosung GT250/650S


Fitment and Clearance help

Storm S7 to be used

1. Re-bend #2 alloy bar as per template below.
2. Use the following items as shown in S7 Instructions parts list, #7 (M8x60FHCSZP), #9 (BEC-L), #11 (S7-LA2) and #10 (S7-LA1).
3. Locate handguards into the required position and apply thread locking compound to #7 M8x60FHCSZP before tightening.

WARNING: Slight contact with the screen may still occur at full lock.
Ensure all controls operate correctly before riding.

Note: Additional clearance may be achieved by rotating the handlebars a few degrees backwards. This will depend on individual riders and their desired riding position.

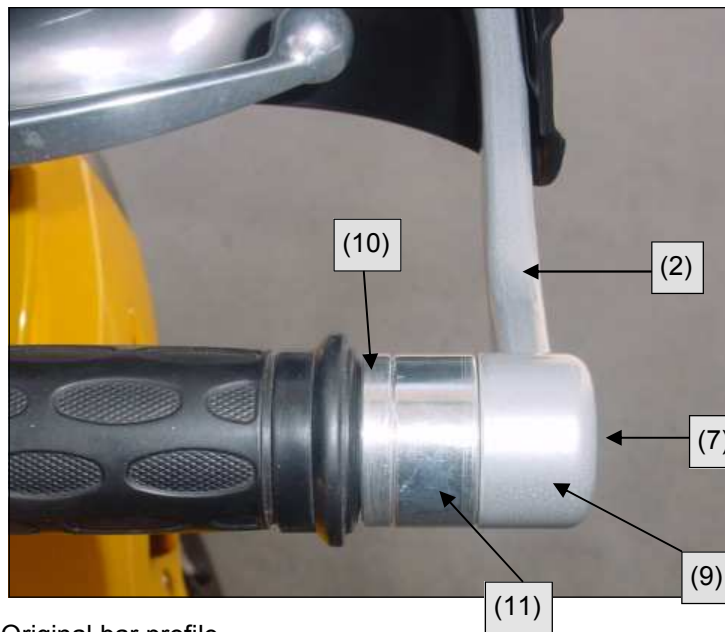

Original bar profile

